

MTS-8000 Tester

All your optical network testing needs covered in a single platform



*The power of one, performing the work of many
A powerful unit*

- Flexible scalable platform
- Industry-leading size and weight
- Interchangeable modules
- Generates test results in seconds
- Fully automatic testing
- Combination of several tests
- Remotely controlled (via Ethernet, Fiber)


Asingleplatformfor

- Attenuation testing
- Dispersion testing
- DWDM systems testing
- New fiber testing (attenuation profile)
- PDH/T-Carrier & SDH/SONET testing up to 10G
- Ethernet testing up to 10GigE


Varietyofmodules to meet all applications

- More than 20 OTDR modules
- Multifunction loss test module
- PMD modules
- CD module
- DWDM analyzers
- High-performance OSAs
- Transport module

Comprehensive optical network platform

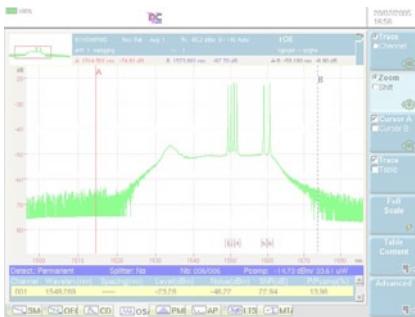

Amplified DWDM system analysis

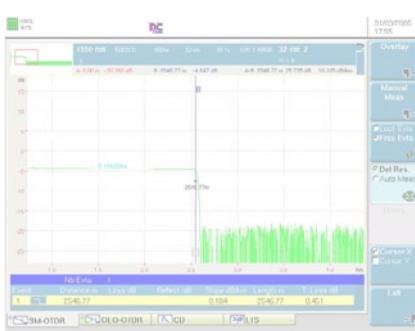

FTTx OTDR testing

Conventional fibertesting

- Ideal for field measurements
- Large variety of OTDR modules
- Length measurement
- Fiber link attenuation
- Reflection
- Splices/connector loss
- Insertion loss
- Optical return loss
- Fast and efficient testing

CWDM/DWDMtesting

- Advanced testing
- Greater functionality
- Higher performance
- 1250 to 1650 nm DWDM measurements
- EDFA & DFB testing
- Channel isolation for BER analysis
- One button testing
- One single port analyzer with channel isolator
- Dual port analyzer with channel isolation
- Transport module

FTTxtesting

- During plant installation and maintenance
- Insertion loss
- Event loss
- Event reflectance
- Distance to events
- Power level
- Total ORL or by section

Main Specifications

MTS-8000 BASE

(typical at 25 °C)

Display

TFT color, 10'4 inches, LCD 800 × 600

TFT color, 10'4 inches,

LCD 800 × 600, High visibility

Touchscreen TFT color, 10'4 inches,

LCD 800 × 600, High visibility

Storage

Internal memory

Hard disk (optional)

Floppy disk drive (optional)

CD read/write (optional)

Input/output interfaces

RS232C, 2 × USB, VGA, RJ45 Ethernet,
 RJ11 modem (optional)

Powersupply/battery

Battery type

standard removable

Li-Ion batteries

up to 16 OTDR hours

with two batteries and standard display,

Telcordia GR-196-CORE

Internal charger

yes

Charging time

<3 hours per battery

Trickle charge

yes

DC input

19 to 25 V

Power supply,

AC/DC adapter

Input 100 to 240 V,

50 to 60 Hz, 1.8 A, output 19 V DC/3.1 A

Size(w×h×d)

Mainframe only
 (with back plate)

320 × 265 × 55 mm/

12.6 × 10.4 × 2.1 inches

Mainframe +

receptacle +

320 × 265 × 116 mm/

Battery pack

12.6 × 10.4 × 4.5 inches

Weight

Mainframe only
 (with back plate)

2.9 kg/6.39 lbs

Mainframe +

5.4 kg/11.9 lbs

receptacle + Battery pack

(with one battery)

Environmental specifications

Temperature range

Operating on mains

(no options) -20 °C to +50 °C (-4 °F to 122 °F)

Operating, all options

0 °C to +40 °C


(32 °F to 104 °F)

Storage -20 °C to +60 °C (-4 °F to 140 °F)

Humidity

95% without condensing

CE compliant

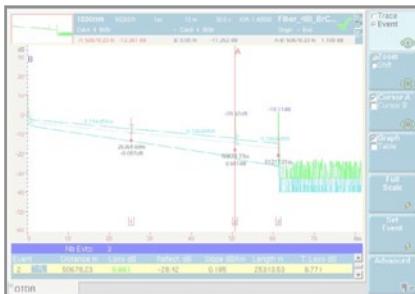

Pass/Fail analysis



Bi-directional OTDR analysis

Wide range of modules

- Short haul to ultra long haul
 - First to market 50 dB dynamic module (at 1550 nm)
 - 1, 2, 3, 4 wavelengths per module (1310/1383/1490/1550/1625 nm)
 - Multimode, singlemode modules
 - Very short dead zones (up to 0.8 m event dead zone)
 - Modules compatible with the MTS-6000 platform

Physical Fiber Testing


- OTDR measurements
 - Optical return loss (ORL) measurement
 - Insertion loss (IL) measurement
 - Visual fault locator
 - Alarm management with PASS/FAIL and

Large number of options

- Connection check with visual fault locator and videoscope
 - Built in talk set with data transfer over fiber capability
 - PC software solution for report generation
 - Includes cable manager function

Automatic bi-directional measurement function

- Automate the acquisition process
 - Check fiber continuity
 - File transfer through the fiber
 - Trace splice loss with both end analysis

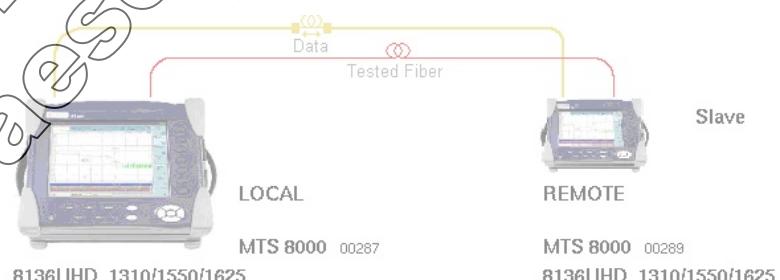

Main specifications

	High performance multimode MM	Short range singlemode SR	Medium range singlemode DR	Long range singlemode HD	Very long range singlemode VLR	Ultra long haul singlemode UHD
Central wavelength ⁽¹⁾	850/1300 nm ± 20 nm	1310/1550 nm ± 20 nm	1310/1550 nm ± 20 nm	1310/1550/1625 nm ± 20 nm ± 10 nm for 1625 nm	1310/1550/1625 nm ± 20 nm	1310/1550/1625 nm ± 20 nm ± 10 nm for 1625 nm
Laser safety class (21 CFR)	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
Pulse width	3 ns to 200 ns	10 ns to 10 µs	5 ns to 10 µs	10 ns to 20 µs	3 ns to 20 µs	10 ns to 20 µs
Distance range	Up to 80 km	Up to 260 km	Up to 260 km	Up to 380 km	Up to 380 km	Up to 380 km
RMS dynamic range ⁽²⁾	25 dB/23 dB	35 dB/33 dB	37 dB/35 dB	42 dB/40 dB/40 dB	45 dB/43 dB/43 dB	46 dB/50 dB/46 dB
Event dead zone ⁽³⁾	1.5 m	3 m	1 m	4 m	0.8 m	4 m
Attenuation dead zone ⁽⁴⁾	5 m	25 m	8 m	15 m	4 m	15 m

⁽¹⁾Central wavelength: Laser at 25 °C and measured at 10 µs for singlemode and 50 ns for multimode


(2) RMS dynamic range: The one way difference between the extrapolated back scattering level at the start of the fiber and the RMS noise level, after 3 minutes averaging.

⁽³⁾ Event dead zone: Measured at ± 1.5 dB down from the peak of an unsaturated reflective event.

Multi-function Loss Test module



View results in one table with Pass/Fail indicator

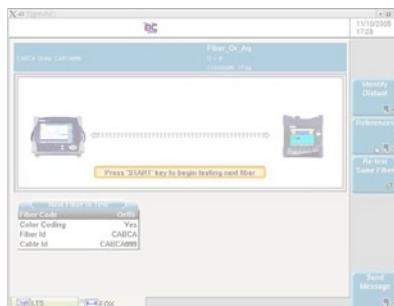

Compatibility with the standalone OFI-2000

Specifications

Multi-function Loss Test Module

(typical at 25° C)

Weight	0.6 kg (1.1 lbs)
Dimensions (w x h x d)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)

Optical interfaces

Applicable fiber	SMF 9/125 µm
Interchangeable optical connectors	FC, SC, DIN, etc...

Bi-directional test set specifications

(typical at 25° C)

Source function (also valid for source mode)	
Laser type	Class 1 laser
Wavelength at 25° C	1310 ± 30 nm, 1490 ± 10 nm, 1550 ± 30 nm, 1625 ± 10 nm
Spectral bandwidth	5 nm maximum
Output level into 9/125 µm fiber (CW mode)	-3.5 dBm
Modulated output average level	3 dB less

All in one module

- Single slot plug-in module for loss, back reflection, and fiber length measurements
- Testing at telecom wavelengths: 1310, 1550, and 1625 nm
- One button automated testing
 - 1- Continuity check
 - 2- Automated bi-directional insertion loss (IL)
 - 3- Automated bi-directional optical return loss (ORL)
 - 4- Length testing
 - 5- Pass/Fail analysis
 - 6- Complete test results storage in both test units
- Additional standalone power meter
- Laser source to measure manually IL (TwinTest compatible)
- Manual ORL measurement possible with only one instrument

Best in class for FTTx Testing

- ITU-T G.983.3 compliant
- Three-wavelength version: 1310, 1490, 1550 nm
- Supports FTTx/PON testing


Multi-platform compatible module

- High performance for all types of networks: transport, metro, access, and FTTx/PON.
- Module compatible with the MTS-6000 Platform
- Can make measurement and communicate with another OFI module or a standalone OFI-2000 Multi-function Loss Test Set.


Standalone power meter

Wavelength range (adjustable per 1 nm)	800-1650 nm
Selectable wavelength	850/1300/1310/ 1490/1510/1550/1625 nm and one user-defined
Auto-λ detection (incl.TWINtest)	850/1310/ 1490/1550/1625 nm
Modulation detection	270 Hz, 330 Hz, 1 kHz, 2 kHz
Display resolution	0.01 dB
Power level	Standard High Power
Dynamic range	+10 to -60 dBm +26 to -55 dBm
Accuracy	± 0.2 dB ± 0.25 dB
Detector type	Ge filtered InGaAs, 2 mm

Chromatic dispersion module for metropolitan networks

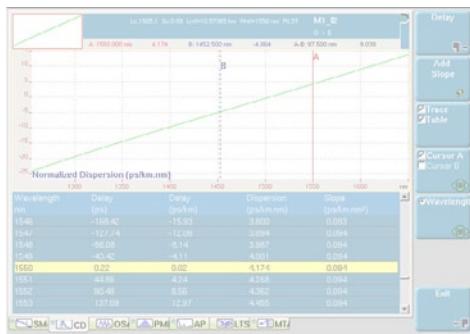

Single menu for chromatic dispersion trace and table display

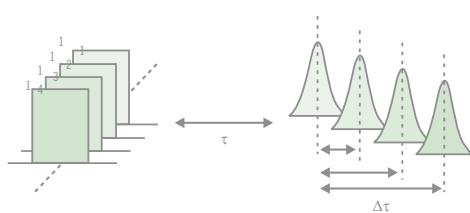

Pulse delay method complies with TIA/EIA FOTP-168

Approved and standardized method

- ITU-T G.650.1
- EIA/TIA FOTP-175-B
- IEC 60793-1-42
- Fast and reliable method
- Single end measurement
- Sectional analysis capability providing CD per fiber section
- 3 functions in 1 : sources, CD, OTDR
- Suitable for all single-mode fibers
- Cost effective method
- Not sensitive to shocks and vibrations (no moving parts)
- Module compatible with the MTS-6000 platform

High performance suitable for any metropolitan network

- Full fiber test performed in only 45 seconds
- Large band coverage (1250 nm to 1650 nm)
- Wide measurement range
- Dynamic range (up to 120 km) dedicated for any metropolitan network configuration

Specifications


Chromatic dispersion module

(typical at 25 °C)

OTDR mode

Central wavelength

Wavelength accuracy⁽¹⁾
RMS dynamic range⁽²⁾
Event dead zone⁽³⁾
Attenuation dead zone⁽⁴⁾



Chromatic dispersion mode

Wavelength range	1255 to 1650 nm
Dynamic range	Up to 120 km
Wavelength absolute accuracy	± 0.1 nm
Dispersion range	0.1 ps/nm*km to 100 ps/nm*km
Zero dispersion wavelength repeatability	± 0.5 nm*
Dispersion coefficient repeatability**	± 0.2 ps/nm*km
Dispersion slope repeatability	± 1%
Measurement time	From 40 s

Optical source mode

Wavelength range	typical 1310/1480/1550/ 1625 nm ± 5 nm
Spectral width	<10 pm
Power stability in 24 hours	1.5/3/3 dBm
Variable output power	-10 dB to calibrated power

(1) DFB lasers

(2) RMS dynamic range: The one way difference between the extrapolated back scattering level at the start of the fiber and the RMS noise level, after 3 minutes averaging.

(3) Event dead zone: Measured at ± 1.5 dB down from the peak of an unsaturated reflective event.

(4) Attenuation dead zone: Measured at ± 0.5 dB from the linear regression using a FC/PC type reflectance.

* For 25 km G.655 link

** For a 75 km G.652 link, at 1550 nm.

Polarization mode dispersion module



PMD test results with Pass/Fail analysis



OBS-15: Broadband polarized light source for PMD measurement



A proven field-dedicated test method

- ITU-T G.650.2
- EIA/TIA FOTP 113
- IEC 60793-1-48
- Fast and reliable method
- Very accurate with the Fourier Transform
- Two ended test method (broadband source and receiver), no additional tools required
- Not sensitive to shocks and vibration (no moving parts)
- Best price/performance ratio on the market
- Module compatible with the MKO-6000 platform

High performance suitable for any fiber optic network

- High dynamic range with field handheld source (-45 dB)
- Wide measurement range with minimum measurable DGD value of 0.08 ps
- Fast measurement time from 6 seconds to improve field efficiency
- Measurement through multiple EDDFAs
- Field convenient instrument (light, small, long battery life...)
- Statistics and long term monitoring

Maximum PMD values allowed for digital signal transmission:

Bit rate per channel	SDH	SONET	Equivalent timeslot	Max. PMD delay	Max. PMD coefficient for a 100 km fiber length
1.5 Gb/s	STM-1	OC-24	803 ps	80 ps	8 ps/√km
2.5 Gb/s	STM-16	OC-48	401 ps	40 ps	4 ps/√km
10 Gb/s	STM-64	OC-192	100 ps	10 ps	1 ps/√km
40 Gb/s	STM-256	OC-768	25.12 ps	2.5 ps	0.25 ps/√km

Specifications

General specifications (typical at 25°C)

Weight	0.6 kg/1.3 lb
Dimensions (w x h x d)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)

Optical interfaces

Applicable fiber	SMF 9/125 µm
Interchangeable optical connectors	FC, SC, DIN, etc.

Polarization mode dispersion module

(typical at 25 °C)

Dynamic range	45 dB
DGD measurement range ⁽¹⁾	0.08 to 60 ps
DGD absolute uncertainty ^{(2), (3)}	± 0.02 ps ± 2% PMD
DGD repeatability ^{(2), (3)}	± 0.025 ps
Measurement time ⁽⁴⁾	6 seconds, independent of the PMD value

(1) Up to 150 ps in weak mode coupling

(2) Weak mode coupling, between the DGD range of 0.1 ps and 60 ps


(3) NPL standard traceable

(4) Without averaging

CWDM/DWDM testing modules



DWDM spectrum display with table of results

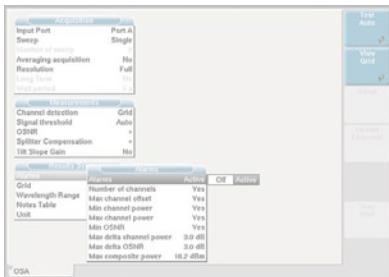

Test set-up display with Pass/Fail settings

Specifications

Full-band DWDM analyzers

Spectral measurement ranges

Wavelength range	1250 to 1650 nm
No. of optical channels	512
Wavelength calibration ⁽¹⁾	internal, on-line
Wavelength accuracy ⁽²⁾	± 20 pm 0.001 nm
Readout resolution	
Resolution bandwidth (FWHM) ⁽³⁾	typ. X5 pm
Wavelength linearity (over 10 nm)	± 10 pm

Power measurement ranges

Dynamic range ⁽⁴⁾	-75 to +23 dBm
Noise floor RMS (with averaging) ⁽³⁾	-75 dBm
Absolute accuracy ^(3, 5)	± 0.4 dB
Linearity ⁽⁶⁾	± 0.05 dB
Readout resolution	0.01 dB
Scanning time (1250 to 1650 nm) ⁽⁷⁾	<1.5 s
Optical rejection ratio ⁽³⁾	
at ±25 GHz (±0.2 nm)	typ 35 dBc
at ±50 GHz (±0.4 nm)	typ 45 dBc
PDL ⁽³⁾	± 0.1 dB
Flatness ⁽³⁾	± 0.2 dB
Level reproducibility ⁽⁸⁾	± 0.05 dB


Channel isolation option (OSA-161/201)

Using the channel isolation function, you can drop channels for further signal analysis with a BERT or a Q-factor meter.

Wavelength range	1250 to 1650 nm
Data rates	up to 10.7 Gb/s

High-performance DWDM analysis

- Rugged reliable field solution
- High wavelength accuracy without external calibration
- Fastest testing time ; 1.5 seconds full band scanning
- Built-in constant wavelength reference for online calibration
- Channel isolation for BER analysis
- Easy to use one button operation with auto-mode
- Patented dual port version
- Alarm management with pass/fail information
- Statistics and long term monitoring

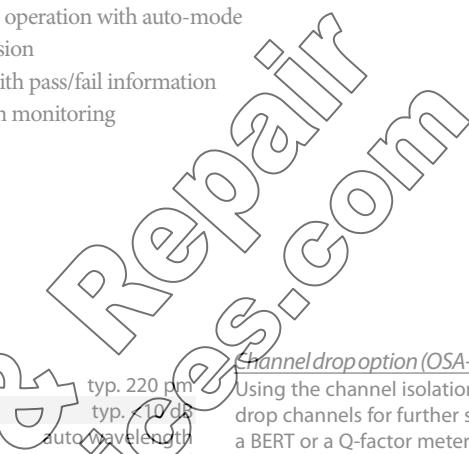

Channel drop option (OSA-301/303)

Using the channel isolation function, you can drop channels for further signal analysis with a BERT or a Q-factor meter.

Wavelength range	1250 to 1650 nm
Data rates	up to 10.7 Gb/s

Spectral filter bandwidth	typ. 220 pm
Insertion loss	typ. <10 dB
Tracking mode	auto wavelength control
Dual port option (OSA-201)	
Simultaneous measurement of two fibers for monitoring or component test applications.	
Optical ports (physical contact interfaces)	
Input ports	
OSA-160/161	1 × SM
OSA-201	2 × SM
Output port (drop port) (OSA-161/201)	1 × SM
Interface	Universal
Optical return loss	>35 dB
Total safe power	+23 dBm

Dual-port option (OSA-303)

Simultaneous measurement of two fibers for monitoring or component test applications.

Optical ports (physical contact interfaces)

Input ports	
OSA-300/301	1 × SM
OSA-303	2 × SM
Output port (drop port) (OSA-301/303)	1 × SM
Interface	universal
Optical return loss	>35 dB
Total safe power	+23 dBm

High-performance DWDM analyzers

Spectral measurement ranges

Wavelength range	1250 to 1650 nm
No. of optical channels	512
Wavelength calibration ⁽¹⁾	internal, online
Wavelength accuracy ⁽²⁾	typ. ± 10 pm
Readout resolution	0.001 nm
Resolution bandwidth (FWHM) ⁽³⁾	typ. 60 pm
Wavelength linearity (over 10 nm)	± 10 pm

Power measurement ranges

Dynamic range ⁽⁴⁾	-75 to +23 dBm
noise floor RMS (with averaging) ⁽³⁾	-75 dBm
Absolute accuracy ^(3, 5)	± 0.4 dB
Linearity ⁽⁶⁾	± 0.05 dB
Readout resolution	0.01 dB
Scanning time (1250 to 1650 nm) ⁽⁷⁾	<1.5 s
Optical rejection ratio ⁽³⁾	
at ±25 GHz (±0.2 nm)	typ. 45 dBc
at ±50 GHz (±0.4 nm)	typ. 48 dBc
PDL ⁽³⁾	± 0.1 dB
Flatness ⁽³⁾	± 0.2 dB
Level reproducibility ⁽⁸⁾	± 0.05 dB

General specifications

Temperature	
Operating	+5 to +50 °C/41 to 122 °F
Storage	-20 to +60 °C/-4 to 140 °F
Dimensions (w × h × d)	350 × 280 × 150 mm 13.8 × 11.0 × 5.9 in
Weight (module only)	2.5 kg/5.6 lbs

(1) Built-in, physical constant wavelength calibrator, needs no re-calibration

(2) At 1520 to 1565 nm at 23 °C

(3) 1520 to 1565 nm at 18 to 28 °C

(4) Max. power per channel +15 dBm, total power +23 dBm


(5) At -10 dBm

(6) -45 dBm to +10 dBm, at 23 °C

(7) Full span 400 nm, 4000 measurement samples, incl. WDM table analysis

(8) 1 min, stable signal, const. temperature

Combined WDM, PMD, AP testing module

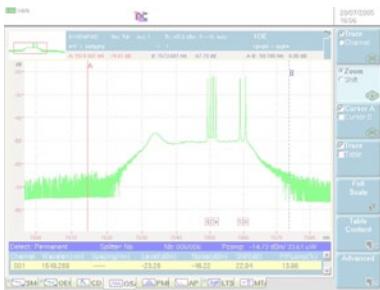

Amplified DWDM system analysis using the E81WDM module



PMD test results showing the first order and second order PMD values



An attenuation profile showing a loss vs. wavelength measurement

A unique solution combining WDM, PMD, and AP (Attenuation Profile) test functions in one plug-in module

- Full-band most compact solution for WDM testing (from 1260 to 1640 nm)
- High-performance PMD module with differential group delay (DGD) measurement in the range of 0.08 ps to 60 ps and high dynamic range of 45 dB
- Attenuation profile provides total loss and dB/km values over a 1260 nm to 1640 nm wavelength range, with a dynamic range of 45 dB
- Shock-proof and vibration-proof instrument with no moving parts (drop tested at 70 cm)
- High-performance module with maximum portability (0.6 kg)
- Module compatible with the MTS-6000 platform

Specifications

81WDM module (typical at 25°C)

General specifications

Weight	0.6 kg (1.1 lb)
Dimensions (w x h x d)	213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.

WDM technical specifications (typical at 25°C)

Wavelength range	1260 nm to 1640 nm
Sweep time (real time)	3 s
Accuracy ⁽¹⁾	±10 ppm
Display resolution	1 pm
Minimum spacing between channels	10 GHz
Optical bandwidth (FWHM) ⁽²⁾	30 pm

Power level

Display range	-90 dBm at +30 dBm
Display resolution	0.01 dB
Measurement range on a channel	-79 dBm at +10 dBm
Noise floor ⁽³⁾	-86 dBm
Maximum admissible power (before signal cut off)	
- Total	+20 dBm
- For one channel	+10 dBm
Accuracy ⁽⁴⁾	±0.5 dB max
Linearity ⁽⁵⁾	±0.2 dB
Flatness ⁽⁶⁾	±0.2 dB
Polarization Dependence Loss (PDL)	±0.15 dB
Optical return loss (ORL)	35 dB
Optical rejection ratio (ORR) ⁽⁷⁾	40 dB at 100 GHz from the carrier 35 dB at 50 GHz from the carrier

(1) Between 1525 nm and 1620 nm from -40 dBm to +5 dBm

(2) Between 1525 nm and 1570 nm

(3) With averaging at 1550 nm

(4) At -30 dBm and 1550 nm (excluding the uncertainty due to the input connector)

(5) At 1590 nm from 0 to -40 dBm

(6) Between 1525 nm and 1620 nm (reference = 1550 nm)

(7) From the top of a carrier, between 1530 nm and 1605 nm at 0 dBm

PMD technical specifications (typical at 25°C)

Dynamic range	45 dB
DGD measurement range ⁽¹⁾	0.08 ps to 60 ps
DGD absolute uncertainty ^{(2), (3)}	± 0.02 ps
DGD repeatability ^{(2), (3)}	± 0.025 ps
Measurement time ⁽⁴⁾	6 seconds, independent of the PMD value

(1) Up to 150 ps in weak mode coupling

(2) Weak mode coupling, between the DGD range of 0.1 ps and 60 ps

(3) NPL standard traceable

(4) Without averaging

AP technical specifications (typical at 25°C)

Dynamic range	45 dB
Measurement time ⁽¹⁾	6 seconds

Handheld broadband source (OBS-15)

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.

Powersupply

Battery operation	NiMH, type AA (rechargeable, exchangeable, 2 pieces)
Operating time	approx. 2.5 h
AC operation by means of SNT-92 AC/DC adapter/charger	
Nominal range of use	100 to 240 V, 50/60 Hz
Operating temperature range	0 °C to +45 °C
Weight (including batteries)	0.55 kg (1.2 lb)
Dimensions (w x h x d)	95 x 49 x 185 mm (0.37 x 0.19 x 0.73 in)

Broadband source module

Wavelength range

BBS1	1485 nm to 1640 nm
BBS2	1260 nm to 1640 nm

Optical interfaces

Applicable fiber	SMF 9/125 μm
Interchangeable optical connectors	FC, SC, DIN, etc.
Weight	0.5 kg (1.1 lb)

Dimensions (w x h x d) 213 x 124 x 32 mm (8.38 x 4.88 x 1.26 in)



Transport module

- Contained in one 5 cm module
 - PDH / T-carrier Interfaces include DS1, E1, E3, DS3, E4, STS-1 and STM-1e
 - SDH/SONET Interfaces include 155M/622M/2.5G/10G (1310 nm, 1550 nm)
 - Ethernet Interfaces include 10/100/1000 Mb/s electrical and 1 GigE Optical (850 nm, 1310 nm and 1550 nm)
 - 10GigE LAN + WAN (850 nm, 1310 nm and 1550 nm)
- Only 2.5 kg fully populated
- Fully scalable to meet your current and future needs
- Optical and electrical signal level measurements
- Up to 2.5 hours at 10 Gb/s rates with one Battery (2 batteries possible)
- SDH/SONET testing
 - Muxed payload generation and analysis
 - Concatenated Signals
 - Automatic Protection Switching (APS)
 - Overhead Byte Manipulation and Analysis
 - Round Trip delay (RTD)
- Ethernet testing
 - Single and Dual Port Ethernet configuration
 - Testing on Layer 1, 2 and 3 (IP)
 - Automated RFC2544 testing
 - Loop-up / loop-down of far-end device

Specifications

Transport module

Optical interfaces

Optical connector types	FC, SC, ST or LC
Wavelength	850, 1310 or 1550 nm
Fiber mode compatibility	1310 and 1550 nm, – singlemode fiber, 850 nm – multimode fiber

Electrical interfaces

Electrical connector types	Bantam, BNC, RJ-45
----------------------------	--------------------

Ethernet testing

Layer 2 (Ethernet) Traffic Generation	Constant, Bursty, Ramp, Flood Configurable Source and Destination Address, Frame Format, Type Field (for DIX), Frame Length (including Jumbo and Undersized), VLAN Tag, Pause Frames, payload, Utilization %
Layer 3 (IP) Traffic Generation	Configurable Source and Destination IP Address, DNS Type, DNS Server, Tx Payload, TOS/DSCP, TTL, Packet Size Length (34 – 1500 bytes), Ping, Trace route

SDH/SONET

Anomaly/Errors generation and analysis	B1, B2, B3, HP-REI, MS-REI, LP-BIP, LP-REI
Defects/Alarms generation and analysis	LOS, LOF, RS-TIM, MS-AIS, MS-RDI, AU-LOP, AU-AIS, HP-UNEQ, HP-RDI, HP-TIM, HP-PLM, TU-LOP, TU-AIS, TU-LOM, LP-UNEQ, LP-RDI, LP-TIM, LP-PLM, LP-RFI

Performance standards

G.821, G.826, G.828, G.829, T1.231, T1.510, M.2100, M.2101

Multiple test access module




Innovative module with up to six interconnected test functions



MTAU interconnections

Multi Test Access Unit Module

- Fiber Characterization made easier, fiber commissioning (OTDR & IL)
- 25% time saving for fiber characterization
- Up to 6 interconnected test functions (OTDR, CD, PMD, IL, SA, ORL)
- Reduces fiber connect/disconnect
- Up to 3 modules connected
- Automatically switches from one module to another

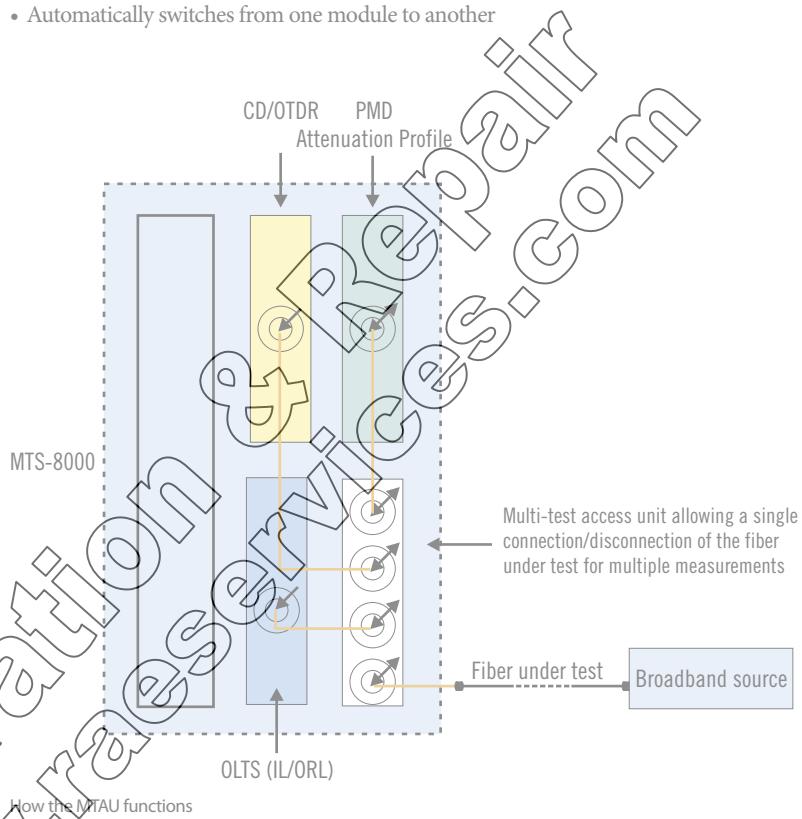

Specifications

Multi-test access unit

	E81MTAU2 (2 ports)	E81MTAU3 (3 ports)
Wavelength range	1260 to 1640 nm	1260 to 1640 nm
Insertion loss (max)	1 dB	1.5 dB
Return loss (max)	50 dB	50 dB
PDL ⁽¹⁾ (max)	0.1 dB	0.1 dB
Repeatability ⁽²⁾ (max)	0.01 dB	0.01 dB


(1) Polarization dependent loss

(2) At constant temperature and polarization

Utility modules



Internal printer with launch cable

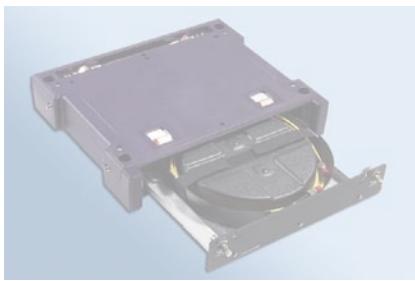


Launch fiber module

Internal Thermal Printer

- On-site documentation
- Shock proof
- High quality printing
- Optimized for trace and table of events printing
- Improves user productivity by instant delivery of trace record

Launch Fiber Module for OTDR Applications - allows full characterization of first and last connectors

- Improves testing at 1310 nm/1550 nm and 1625 nm
- Single mode fibers
- 2 or 4 km long
- Includes 2 patchcords (3 m)
- Rugged design for field application
- Can be used either inserted in the MTS 8000 platform (permanent availability) or as a stand-alone launch fiber
- Can be used in 2 positions; opened or closed
- Compatible with launch fiber management within OTDR firmware

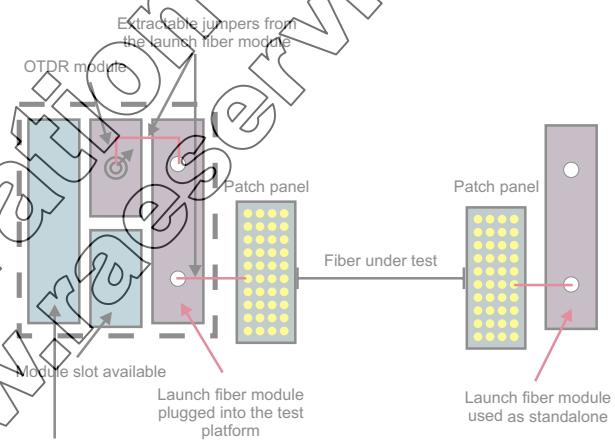

How the launch fiber module functions

Specifications


Thermal printer module

Printer type	Thermal printer
Quality	832 dots/line
Paper width	112 mm paper width

Launch fiber module

Fiber type	Standard singlemode fiber (G.652)
Fiber length	2 km or 4 km ± 5%
Linear attenuation at 1550 nm	0.20 dB/km
Insertion loss	<0.5 dB
Return loss	>35 dB
Weight	2.3 kg/5.1 lbs
Size (l × w × d)	310 × 255 × 60 mm 12.2 × 10 × 2.4 in

Fiber Scope, Loss Test Set, Talkset and VFL functions

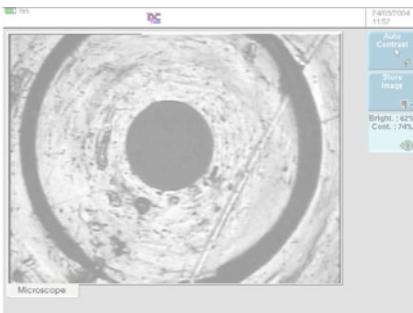

Connector surface inspection



Loss test set results display

Connector Inspection Scope

- Video inspection probe for fiber optic terminations
- For inspection of patchcords and patch panels
- 250 or 400 magnification
- Uses MTS-8000 large screen (10.4")
- Possibility to freeze the image
- Image storage and reload
- Comparison with 3 other images on the same screen
- Compatible with standard connectors including SC, ST, FC and LC

Built-in Optical Talkset

- Suitable for any application
- Cost-effective solution
- Suitable for use in central offices (unlike cell phones)
- Data transfer capability: file exchange or remote control
- Used also for full automatic bi-directional measurements

Insertion Loss Measurements

- Power meter integrated in MTS-8000 mainframe
- Multi-wavelength laser source with CW or modulated signals
- Easy loss measurements of a jumper or patchcord

635 nm Visual Fault Locator

- Universal push/pull for all 1.25 mm connector types

Specifications

Optical video inspection probes

Physical characteristics

Operating temperature	0 °C to 50 °C
Storage temperature	-20 °C to 50 °C
Humidity	95% non condensing
Interface	USB
Weight	115.6 g (4.08 oz.)
Dimensions (w x h x l)	45.7 x 43.2 x 140 mm (1.8 x 1.7 x 5.5 in)

Optical characteristics

Magnification	200x or 400x
Light source	blue LED, internal to probe
Lighting technique	coaxial
Focus control	adjustable, in probe
Max. input power	+30 dBm

Adaptertips

Termination-specific probe tips available:
 FC, SC, ST, LC and other types for 1.25 mm &
 2.5 mm ferrules.

Storage

File format JPEG, BMP

Optical interfaces (optional)

Powermeter

Power level	+10 to -55 dBm,
Calibrated wavelengths	850, 1310, 1550 nm
Connector type	universal push/pull

Talkset


Wavelength	1550 nm ± 30 nm
Dynamic range	>45 dB
Function	With data/file transfer,
Laser safety	Class 1 laser,
Connector type	Field interchangeable

VFL


Wavelength	635 nm ± 15 nm
Output power level	<1 mW
Laser safety	Class 2 laser,
Connector type	Universal push/pull

CW light source


Wavelengths (selection)	1310/1550/1625 nm
Output power level	-3.5 dBm
Spectral width	<5 nm
Stability in 15 min	± 0.02 dB
Stability in 8 hours	± 0.2 dB
Laser Safety	Class 1 laser
Connector type	Field interchangeable

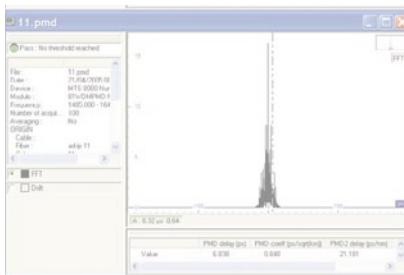

Example of PMD results page

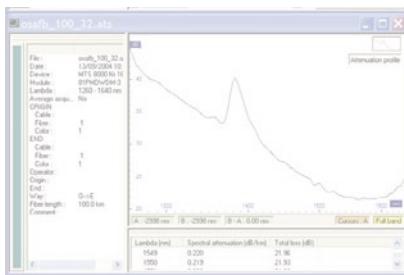


Example of AP results page

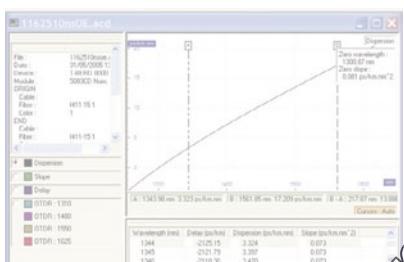

Example of CD results page



Example of OTDR results page

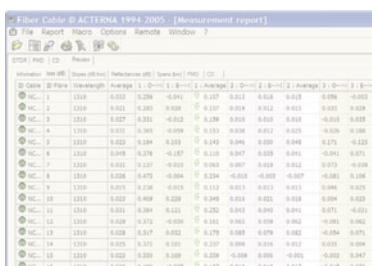

Example of cable report

OFS-100 Fiber Trace Results Analysis

- OTDR, CD, PMD, AP, IL/ORL and OSA results analysis
- Batch processing capability via an automation process
- Pass/Fail function
- Customized printouts
- Ideal for report generation on single fiber

OFS-200 Fiber Cable Acceptance Report Generation

- Direct access keys for easy process and efficiency
- Complete fiber characterization reporting capability including bi-directional OTDR, CD, PMD, AP, IL and ORL results
- Advanced OTDR functions for loop back and mid point management
- Powerful report preview to avoid errors during processing
- Ideal for report generation on multiple fibers

Specifications

OFS-100 FiberTrace

OFS-200 FiberCable

Compatibility with all files generated by the MTS-5000, MTS-8000 and MTS-6000 platforms, OFI-2000 and ONT platform OSA data. FiberCable includes all FiberTrace functions.

PC Requirements

An IBM Pentium 133 MHz PC or 100% compatible computer (Pentium II 233 MHz or above recommended)

A hard drive and a CD-ROM drive

16 MB or more of memory (64 MB recommended)

A mouse pointing device

Microsoft Windows™ version 95, 98, 2000, NT, or XP

Microsoft Excel™

Memory requirements for Microsoft Excel™

Report macro: 48 MB or more of memory

(128 MB recommended)

A 800 × 600 pixels monitor (1152 × 864 or above recommended)

Ordering information

MTS-8000

Base instrument options

EM8000bt	MTS-8000 platform with battery pack
E8100	Receptacle for two plug-in modules
E80HVCOL	High visibility TFT color display
E80HTCOL	High visibility touchscreen TFT color display
E80Hdisk	Hard disk drive
E80FD	Extractable floppy disk drive
E80CDRW	Extractable R/W CD-ROM drive
E80MDM	Built-in PSTN modem
E80VFL	VFL with UPP connector
E80TS	Optical talk set
E80PM	Optical power meter with UPP connector (2.5 mm provided as standard)
E8036LTSTS	Optical loss test set with talk set 1310/1550/1625 nm

Main accessories

E80keyB	External keyboard
E80Lilon	Additional Li-Lon rechargeable battery
E80Scase1	Wrap around soft carrying case for MTS-8000 and 2 plug-ins receptacle configuration
E80Scase2	Soft carrying case for long configuration
E80Scase3	Soft carrying case for MTS-8000 and 2-slot receptacle, or transport or OSA-160/200 module
E80Hcase	Hard transit case for long configuration
C80Hcase5	Hard carrying case for MTS-8000 and 2-slot receptacle or transport or OSA-160/200 module

Application software

EOF5100	Optical FiberTrace software (for post-analysis)
EOF5200	Optical FiberCable software (for cable acceptance report generation)

MTS-8000 modules

Multimode OTDR plug-in module

E8123MM	High resolution 850/1300 nm
---------	-----------------------------

Singlemode OTDR plug-in modules

E8126SR	Short range 1310/1550 nm
E8126DR	Medium range high res. 1310/1550 nm
E8126HD	Long range 1310/1550 nm
E8127HD	Long range 1625 nm
E8136HD	Long range 1310/1550/1625 nm
E8126VHD	Very long range 1310/1550 nm
E8127VHD	Very long range 1625 nm
E8129VHD	Very long range 1550/1625 nm
E8126UHD	Ultra long range 1310/1550 nm
E8136UHD	Ultra long range 1310/1550/1625 nm

Chromatic dispersion plug-in module

E5083CD	Medium range 1310/1480/1550/1625 nm OTDR/CD module
E508XLS	1310/1480/1550/1625 nm DFB source option

Polarization mode dispersion plug-in modules

E81PMD	PMD module (1480 to 1640 nm)
E81WDMPPMD	PMD module (1360 to 1640 nm) combined with WDM and AP
EOBS15	Stand alone broadband source
E81BBS1	1480-1640 nm broadband source module
E81BBS2	1260-1640 nm broadband source module

OFI plug-in module

E8126OFI1	1310/1550 nm OFI plug-in module - standard power
E8126OFI2	1310/1550 nm OFI plug-in module - high power
E8136OFI1	1310/1550/1625 nm OFI plug-in module - standard power
E8136OFI2	1310/1550/1625 nm OFI plug-in module - high power
E8132OFI1	1310/1490/1550 nm OFI plug-in module - standard power
E8132OFI2	1310/1490/1550 nm OFI plug-in module - high power

High Performance OSA modules

2281/91.01	OSA-160 Single port analyzer
2281/91.12	OSA-161 Single port analyzer with channel isolator option
2281/91.14	OSA-201 Dual port analyzer with channel isolator option
2281/91.31	OSA-300 High-performance analyzer
2281/91.32	OSA-301 High-performance analyzer with channel isolator option
2281/91.34	OSA-303 High-performance dual port analyzer with channel isolator option
E81WDM	1485-1640 nm WDM plug-in module

Transport module configurations

C83XX	SDH/SONET configuration
C84XX	Ethernet configurations
C85XX	SDH/SONET & Ethernet configurations

Utility modules

Multi-test access unit plug-in module

E81MTAU2	Up to 2 test ports
E81MTAU3	Up to 3 test ports

Launch fiber module

E82LFSM2	2 km singlemode G.652
E82LFSM4	4 km singlemode G.652

Ordering information

Thermal printer module

E82Printer Thermal printer module

Accessories

Optical video inspection probes

EFSCOPE250 Optical inspection probe, 250x through USB

EFSCOPE400 Optical inspection probe, 400x through USB

Connectors and adapters

Optical inspection

ETIPSCAPC	SC/APC tip, bulkhead adapter
ETIPE2000	E2000 tip, bulkhead adapter
ETIPSCPC	SC/PC tip, bulkhead adapter
ETIPU125MM	Patch cord tip for 1.25 mm ferrule
ETIPU25MM	Patch cord tip for 2.5 mm ferrule
ETIPFCAPC	FC/APC tip, bulkhead adapter
ETIPSTPC	ST/PC tip, bulkhead adapter
ETIPLC	LC tip or bulkhead adapter
ETIPFCPC	FC/PC tip, bulkhead adapter
ETIPMPOAPC	MPO/APC tip, bulkhead adapter
ETIPMPO	MPO tip, bulkhead adapter

Optical connectors

Universal singlemode connectors

EUNIPCFC, EUNIPCSC, EUNIPCSST, EUNIPCDIN, EUNIPCLC, EUNIAPCFC, EUNIAPCSC, EUNIAPCST,
EUNIAPCDIN, EUNIAPCLC

For more information on test adapters, cables, and fiber optic couplers, please refer to the separate
datasheet entitled "JDSU Fiber Optic Test Adapters and Cables".

**JDSU**To receive a calibration and/or repair quote-RMA from R.A.E. Services Inc.
Click here>> www.raeservices.com/services/quote.htm

MTS 8000 Tester

Useful accessories



E80PWE, E80PWUK, E80PWUS: Standard AC adapter/charger



E80HPWE, E80HPWUK, E80HPWUS: Adapter/charger for transport module



E80Lilon: Additional Li-Ion rechargeable battery



E80lighter: Cigarette lighter power adapter



E80HCase: Hard Transit Case for long configuration (multiple modules)



E80HCase5: Hard carrying case – single module configuration



E80SCase2: Soft carrying case for multiple module platform



E80SCase3: Soft carrying case for single module platform



E80SCase1: Wrap around case for 8000 platform and receptacle



E80CFAPP: Transport module application card



E80USBMEM: USB stick 128 MB



EFSCOPE250, EFSCOPE400: Optical video inspection probe



E80FD: Extractable floppy disk drive



E80CDRW: Extractable R/W CD ROM drive

E80keyB: USB keyboard

EOFS100, EOFS200: FiberTrace and Fiber-Cable softwares

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its applications. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders.

© 2006 JDS Uniphase Corporation. All rights reserved.

10143191 001 0906 MTS8000CONS.DS.FOP.TM.AE

Test & Measurement Regional Sales

NORTH AMERICA TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	LATIN AMERICA TEL:+55 11 5803 5800 FAX:+55 11 5505 1598	ASIA PACIFIC TEL:+852 2892 0990 FAX:+852 2892 0770	EMEA TEL:+49 7121 86 2222 FAX:+49 7121 86 1222	WEBSITE: www.jdsu.com/fiberoptictest
---	--	---	---	--