

To receive a calibration and/or repair quote-RMA from R.A.E. Services Inc.
Click here>> www.raeservices.com/services/quote.htm

DASH 8 SERIES

DATA ACQUISITION RECORDERS



- ❖ Signal conditioning for any application
- ❖ 10.4" color monitor for real-time viewing and playback
- ❖ Internal 8 GB hard drive for data capture
- ❖ 100 MB ZIP® drive and Ethernet for data transfer
- ❖ 8 channels with 20 KHz per channel sample rate
- ❖ PC-based data review and analysis software
- ❖ Rugged, compact & portable – less than 20 lbs.

 **Astro-Med, Inc**

NIST, ISO, IEC, ANSI, NCSL, MIL-STD by www.raeservices.com

The Dash® 8 series from Astro-Med are powerful data acquisition recorders. Ideally suited for both chart recording and data acquisition, they were designed for today's demanding applications.

BIG COLOR MONITOR

The Dash 8 series recorders feature a built-in, 10.4-inch color monitor that adds another dimension to chart recording. Signals may be displayed in real-time on the monitor, saving chart paper during recorder setup. And to make data even easier to interpret, the Dash 8 allows you to make each channel a different color.

VERSATILE INPUTS

There are two powerful models to choose from. The Dash 8n offers isolated inputs up to 250 VRMS, built-in offset adjustment and an almost unlimited number of full scale selections, giving you the versatility you need for almost any voltage recording. The Dash 8u has flexible universal inputs making your connection even easier. From single ended and differential voltage to thermocouple (J, K, E, T) and DC bridge inputs, the Dash 8u allows you to connect almost any signal without external conditioning. The Dash 8u also supports optional input modules for RTD, isolated high voltage and frequency to voltage.

CHART PRINTING

With all the powerful data capture and display features of the Dash 8 series, it's easy to forget about the integral chart recorder. The high resolution, 8.5 inch chart give you real-time recording at the push of a button. Chart speeds are front panel selectable from 1mm per hour to 100mm per sec. And channels can be displayed in any format, from individual to overlap to completely custom.

FREQUENCY RESPONSE

With 16-bit A/D converters sampling at 20,000 samples per second for each channel, the Dash 8 series provides the

frequency response you need to record all your data. Signals up to 2 kHz may be displayed, printed and stored to memory.

MEMORY AND STORAGE

Sometimes real-time chart recording is not enough. That's why we designed the Dash 8 series to be both a chart recorder and a data acquisition system. The internal, 8 Gbyte hard drive lets you capture hours, days or even weeks of data for later review and analysis. And best of all, data can be captured in parallel with (or in place of) real-time recording. With the Dash 8 series, you get the best of both worlds, in one compact, rugged package.

REVIEW AND PLAYBACK

Once data has been captured to memory, the Dash 8 series monitor really goes to work. Captured data may be displayed on the screen, giving you a quick look at all your data files. On-screen cursors handle the rest, providing timing and amplitude information. For even more detail, simply zoom in on important events and print the screen. With the Dash 8 series recorders, you print only what you want.

GET YOUR DATA QUICKLY AND EASILY TO A PC


The Dash 8 series offers a variety of option to get captured data to your PC quickly and easily. For smaller files, simply copy data to the Dash 8's ZIP drive and carry it to your PC. When direct connection to a PC is desired, the Dash 8 has both an Ethernet and SCSI port for

SETUP YOUR ENTIRE TEST FROM YOUR PC

AstroSET, the Dash 8 series offline setup program, makes setting up a test easier than ever. With its intuitive interface, this Windows-based program gets you up and running in minutes.

INTELLIGENT TRIGGERING

The Dash 8 series recorders offer versatile triggering including waveforms, event pattern, manual pushbutton or an external source. In addition, the recorder can be set to trigger at a specific time, or periodically at a fixed time period.

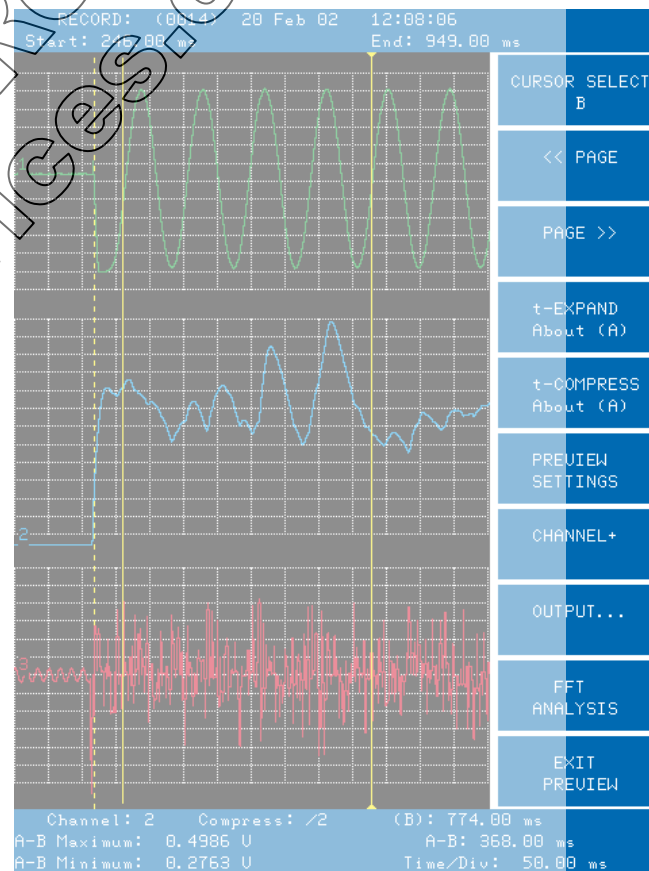

Real-time full size color monitor.

LIGHTWEIGHT, RUGGED, AND PORTABLE

The Dash 8 series pack a lot of power into a compact aluminum case. Weighing under 20 pounds, these recorders can easily fit under the seat of an airplane.

DASH 8N INPUTS

Number of Channels 8
 Input Type Isolated, single-ended
 Connector. 2 guarded banana jacks
 UL Rated Input 250 Vrms
 Measuring Range 50 mV full scale to 500 V full scale
 Bandwidth 2 kHz (-3dB)

DASH 8U INPUTS

Number of Channels 8
 Input Type Universal
 Connector. Screw terminal with removable connector

VOLTAGE INPUTS

Types Isolated single-ended, isolated differential
 Absolute Maximum Input. . . Single-ended: 40 V differential: 40 V
 Measuring Range Single-ended: 500 mV to 40 V full scale
 Differential: 5 mV to 500 mV full scale
 Bandwidth 2 kHz (-3dB)

THERMOCOUPLE INPUTS

Types. J, K, E and T
 Absolute Maximum Input. . . 40 V
 Measuring Range Type J: 0° C to 760° C
 Type K: 0° C to 1370° C
 Type T: -160° C to 400° C
 Type E: -100° C to 1000° C
 Bandwidth 10 Hz (-3dB)
 Isolation 250 Vrms (between iso-commons and chassis)
 Engineering Units °C or °F

DC BRIDGE INPUTS

Type Isolated full bridge
 Absolute Maximum Input. . . 40 V
 Excitation. Isolated 10 V at 50 mA
 Measuring Range 5 mV full scale to 500 mV full scale
 Bandwidth 2 kHz (-3dB)
 Isolation 250 Vrms (between iso-commons and chassis)

OPTIONAL DASH 8U MODULES

RTD-8u Supports platinum RTD's
 HV-8u Accepts voltages up to 250 Vrms
 VHV-8u Accepts voltages up to 600 Vrms
 FV-8u For frequency measurements up to 20 kHz

The following specification are common to both Dash 8n and Dash 8u:

DIGITAL SIGNAL PROCESSING

Sample Rate 20 kHz
 ADC Resolution 16-bit
 Functions Filter, RMS, integration, differentiation
 Filter Choices Low pass, high pass, notch, bandpass

EVENT INPUTS

Number of Inputs. 8 external event markers
 Input Types TTL with pull-up

FRONT PANEL DISPLAY

Type Active matrix color LCD
 Viewing Area 10.4" (26.4cm) diagonal, 8.5" (21.6cm) wide

CHART RECORDER

Recording method Direct thermal
 Chart Size. 216mm (8.5") W x 139mm (5.5") L;
 Z-fold, 300 sheets, 137.5 ft.
 Resolution 8 dpm (200 dpi) amplitude axis;
 10 dpm time axis
 Chart Speed 1 mm/hr to 100 mm/sec; ± 2% accuracy
 Time marking Tri-state (x1, x100) mark on either chart
 edge. Selectable time mark reference
 (0.02 to 1 sec or external)
 Annotation System log printed automatically (time,
 date, speed). Each grid has one line of
 text (128 ASCII characters); An on-demand
 text buffer available (128 characters)
 Data Logger Numerical printout up to 2 lines/second

DATA CAPTURE

Sample Rate 12 Hz to 20 kHz per channel
 Disk Capacity 8 Gbyte
 Time Stamp Time/date automatically saved with data
 Trigger Point Location Pre and post-trigger percentage adjustable
 Auto Arm Allows automatic stacking of captures

TRIGGER ACQUISITION SOURCES

Window All active waveform channels simultaneously
 Logic AND/OR combinations
 Special Slew rate or slope/level
 Event. Binary combination of active event states
 Clock. Time of day or periodic
 Other Sources Both manual and hard-wire trigger inputs

RECORD REVIEW

Formats Strip chart, numeric tabular, XY plot
 Display Preview with cursor measurement
 Chart Playback all or any section at x1/8 to x8

POWER

Input Voltage 90-250 VAC to 500 or 60 Hz (auto-select)
 Power Consumption 100 watts typical, 200 watts maximum

PHYSICAL

Case Material. Aluminum
 Dimensions 6.4" (16.26cm) L x 11.2" (28.44cm) W
 x 5.2" (13.2cm) H
 Weight. 20 lbs. (9.09kg)

ENVIRONMENTAL

Operating Temperature 5 to 40 degrees C
 Non-Operating Temperature. . -15 to 60 degrees C
 Operating Humidity 10% to 95%, non-condensing

MISCELLANEOUS



ZIP Drive 100 Mbyte capacity
 Utility Port Connections for start/stop, remote drive,
 trigger and events
 Controls Full alphanumeric keypad, softkeys,
 encoder wheel
 System status, chart information

ASTROVIEW C REVIEW AND ANALYSIS SOFTWARE

AstroVIEW C, the Windows-based data review software for the Dash 8 series, makes it easier than ever to review and analyze your data. From viewing data on your PC monitor to importing data into your data analysis program, AstroVIEW does it all. AstroVIEW C is designed for Windows® 95/98/ME and Windows NT/2000.

AstroVIEW is simple enough for anyone to use but powerful enough to handle however much data you give it. For troubleshooting or trending applications, it lets you review an entire record - minutes, days, or even weeks of data - on a single screen. And for even more detail, simply click on important data and perform a time or amplitude zoom in seconds. AstroVIEW also offers built-in analysis functions such as Fast Fourier Transforms, RMS conversion, and lowpass filtering.

After capturing data and reviewing it in AstroVIEW C, built-in conversion routines allow you to convert Dash 8 series data to popular spreadsheet formats such as Excel®, Lotus® 1-2-3, DADiSP™ and MathCad.™ It has never been easier to get data from your recorder to your spreadsheet or analysis program.

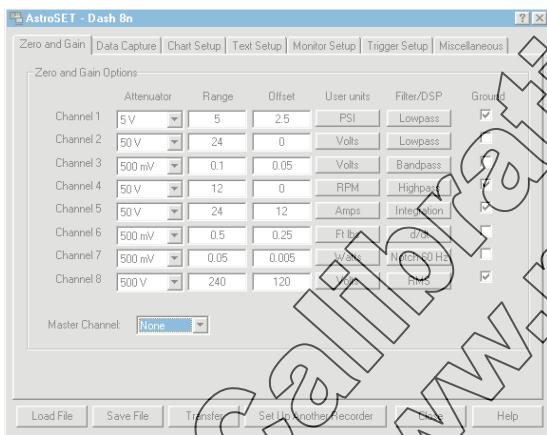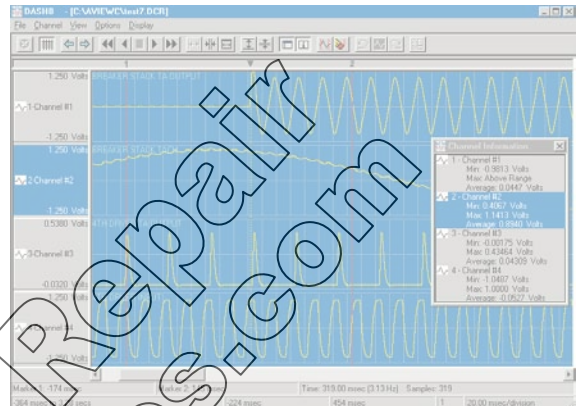

ASTROSET SETUP SOFTWARE

Are you more comfortable in a PC environment? If you are, then you will truly appreciate our Windows-based AstroSET offline setup program. With AstroSET, all Dash 8 series setup is done on your PC with the familiar Windows graphical interface that you are used to. You can set analog gains, speeds, capture settings - virtually every recorder setup that you want. When your setup is complete, simply download it to the Dash 8 series via the Ethernet interface. For remote applications, copy your setup to Zip disk and load it in the Dash 8 series in the field - it's that easy!

Windows and Excel are registered trademarks of Microsoft Corporation. ZIP is a registered trademark of Iomega Corporation. Lotus 1-2-3 is a registered trademark of Lotus Development Corporation. DADiSP is a trademark of DSP Development. MathCad is a trademark of MathSoft, Inc.



World Headquarters

Astro-Med Industrial Park
 West Warwick, Rhode Island 02893 U.S.A.
 Phone (401) 828-4000 • Fax (401) 822-2430
 E-mail: mtgroup@astromed.com
 Web Site: www.astro-med.com
Toll-Free Phone (U.S.A. only):
 (877) 867-9783

FACTORY SALES AND SERVICE CENTERS

CANADA • Astro-Med, Inc., 648 Rue Giffard
 Longueuil, PQ J4G 1T8 Canada • Tel. (450) 651-7973 / Fax (450) 651-8987
UNITED KINGDOM • Astro-Med House, 11 Whittle Parkway
 Slough, Berkshire SL1 6DQ • Tel. (44) (1628) 668836 / Fax (44) (1628) 664994
FRANCE • Astro-Med SNC, Parc d'Activités de Pissaloup, 1 Rue Edouard
 Branly, 78190 Trappes • Tel. (33) (1) 3482.0900 / Fax (33) (1) 3482.0571
GERMANY • Astro-Med GmbH, Senefelderstraße 1/T6 D-63110 Rodgau
 Tel. (49) (6106) 75033 / Fax (49) (6106) 771121
ITALY • Astro-Med S.R.L., Via Plezzo 8, 20152 Milano
 Tel. (39) (02) 2641.1909 / Fax (39) (02) 2641.2828

NIST, ISO, IEC, ANSI, NCSL, MIL-STD by www.raeservices.com

Astro-Med is system certified to ISO9001.